


ASSEMBLY INSTRUCTION


1. NAMES AND FUNCTIONS OF PARTS

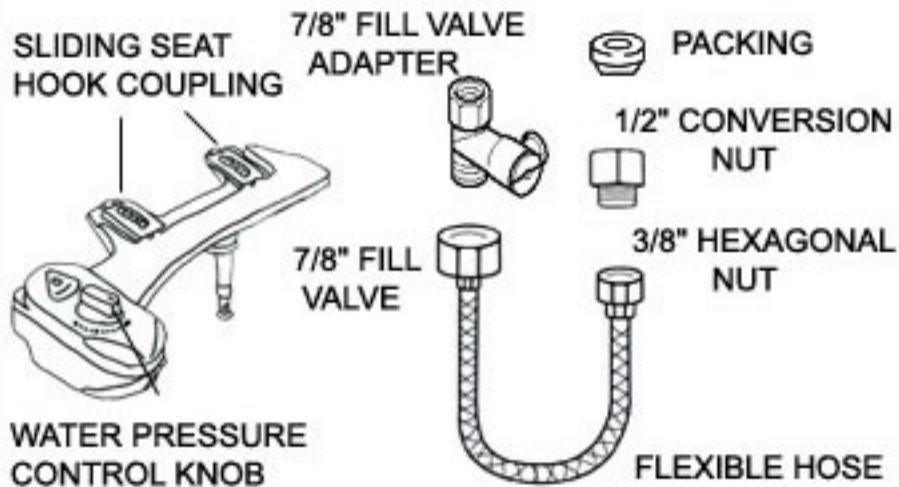


2. PREPARATION

- Remove the existing toilet seat.
- Turn off the water valve.
- Flush toilet to drain tank completely.
- Take out exiting water pipe.

3. INSTALLATION

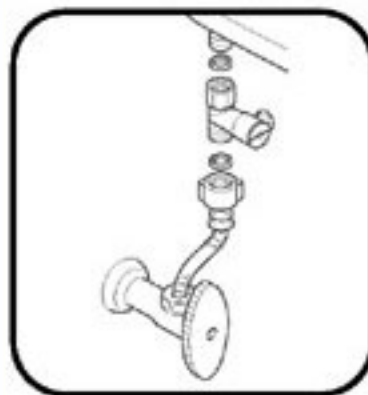

A. Install adapter beneath water tank.

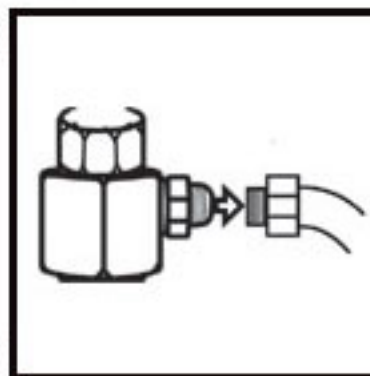

B. Remove plug and connect into adapter nipple.



C. Install main body.

4. TRYING YOUR *BioBidet* FOR THE FIRST TIME

CONGRATULATIONS! You are ready to use the *BioBidet* for the first time. Be sure to turn water pressure control knob gently until reaching your desired pressure. Water pressure control device is only to control water pressure, not for setting up the duration of water spray.

5. TROUBLE SHOOTING



If your spray outlet hole is clogged for some reason, simply try to move spray outlet up and down for a few times manually.